

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 054 489 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.11.2000 Bulletin 2000/47

(51) Int. Cl.⁷: **H01S 3/067**, H01S 3/30,
H04B 10/17

(21) Application number: 00303713.2

(22) Date of filing: 03.05.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

• **Xue-hang, Shan**
Thamesmead West, London SE28 0HS (GB)
• **Willeits, Derek**
Dartford, Kent DA2 6NL (GB)

(30) Priority: 19.05.1999 GB 9911665

(74) Representative:
Harrison, David Christopher
MEWBURN ELLIS
York House
23 Kingsway
London WC2B 6HP (GB)

(71) Applicant: **ALCATEL**
75008 Paris (FR)

(72) Inventors:
• **Hazell, Neville**
West Wickham, Kent BR4 0DX (GB)

(54) An optical amplifier

(57) The present invention provides an optical amplifier for a wavelength division multiplexed communication system, including a first amplifier stage responsive to changes in gain to cause a wavelength dependent gain tilt in one direction, a second amplifier stage (3) responsive to corresponding changes in gain to cause a wavelength dependent gain tilt in an opposite direction and gain control means (4) for controlling the

gain of the first (2) and second (3) amplifier stages to maintain a substantially flat response for the amplifier (1) over time, in which the first amplifier stage (2) is a length of optical transmission fibre providing a Raman amplifier. The present invention provides an optical amplifier which uses dynamic gain tilt adjustment whilst maintaining a constant output level from the amplifier.

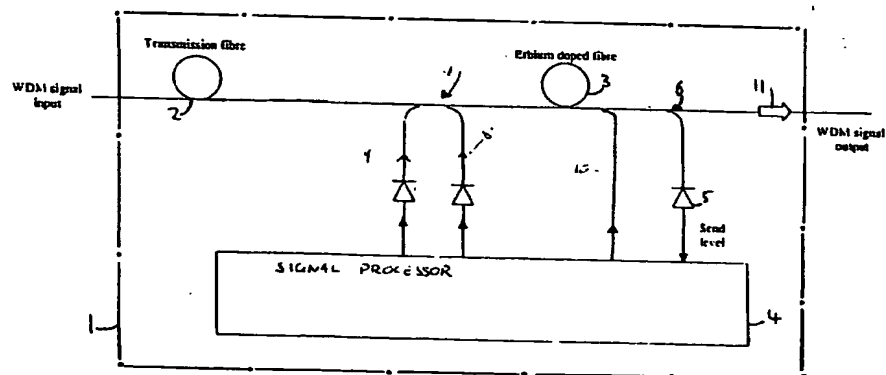


Fig 1

EP 1 054 489 A2

Description

Field of the Invention

[0001] The present invention relates to an optical amplifier and in particular an optical amplifier suitable for use in a Wavelength Division Multiplexed (WDM) communications network.

Background to the Invention

[0002] In optically amplified WDM communications systems, to achieve acceptable signal-to-noise ratios (SNR) for all WDM channels it is necessary to have a constant value of gain for an optical amplifier irrespective of the wavelength of any particular input channel. This is known as gain flatness and is defined as a low or zero value of the rate of change of gain with respect to wavelength at a fixed input level. Conventional amplifiers achieve gain flatness by careful design of Erbium Doped Fibre Amplifiers (EDFAs) and with the use of gain flattening filters. In addition, to ensure a constant output level from an optical amplifier when the input level changes most optical amplifiers also include an Automatic Level Control (ALC) circuit to adjust the gain by controlling the pump level. However, when the pump level is adjusted, the gain flatness of the amplifier is adversely affected exacerbating or introducing a gain tilt to the EDFA.

[0003] Fixed gain flattening filters may be used to address this problem. However, input level changes can be caused by cable ageing, cable repair or a fault in another EDFA in the amplifier, all of which may vary with time. Fixed gain flattening filters can not compensate the gain tilt changes that are caused by these variations. Alternative methods have been proposed to provide dynamic gain tilt adjustment, for example, making use of a variable gain equaliser or using an external attenuator coupled to the input of the EDFA. However, these devices are expensive and lead to an inevitable loss of gain of the amplifier over time.

Summary of the Invention

[0004] According to a first aspect of the present invention, an optical amplifier for a wavelength division multiplexed communications system, comprises:

a first amplifier stage responsive to changes in gain to cause a wavelength dependent gain tilt in one direction;

a second amplifier stage responsive to corresponding changes in gain to cause a wavelength dependent gain tilt in an opposite direction; and,

gain control means for controlling the gain of the first and second amplifier stages to maintain a sub-

stantially flat response for the amplifier over time in which the first amplifier stage is a length of optical transmission fibre providing a Raman amplifier.

[0005] The present invention provides an optical amplifier which uses dynamic gain tilt adjustment whilst maintaining a constant output level from the amplifier. As such, the amplifier is particularly suitable for use in an optical repeater in a submarine communications network in which changes in the input level can occur as a result of many unpredictable factors as discussed above.

[0006] Preferably, the gain control means comprises a signal processing circuit coupled to an output of the optical amplifier arranged to detect changes in output level of the amplifier and adjust the gains of the first amplifier stage and the second amplifier stage accordingly and the signal processing circuit comprises a pump control circuit arranged in a negative feedback control loop around at least one amplifier stage, such that when a decrease in output level of the amplifier is detected the gains of the first amplifier stage and the second amplifier stage are adjusted accordingly to maintain the output of the amplifier at a substantially constant level.

[0007] As well as maintaining the output level of the amplifier at a constant level, the gain tilt of the amplifier with respect to input signal wavelength is maintained as substantially flat.

[0008] Preferably, the gain control means comprises at least one pump source arranged to provide pump light to the first amplifier stage and to the second amplifier stage, the power of the pump light being controlled in dependence on the output level of the amplifier.

[0009] More preferably, the amplifier further comprises an optical splitter arranged to couple a predetermined proportion of the pump light to the first amplifier stage thereby causing a wavelength dependent gain tilt in a first direction and a predetermined proportion of the pump light to the second amplifier stage thereby causing a wavelength dependent gain tilt in an opposite direction.

[0010] The overall increase in gain of the amplifier which is required can be provided by an increment in gain of the first amplifier stage and an increment in gain of the second amplifier stage. Therefore, the output level of the amplifier will be maintained and no undesired gain tilt will be introduced into the amplifier response.

[0011] According to a second aspect of the present invention, an optical repeater for a submarine communications system comprises an optical amplifier according to the first aspect of the present invention.

[0012] According to a third aspect of the present invention, a submarine communications system comprises at least one optical repeater according to the second aspect of the present invention.

Brief Description of the Drawings

[0013] An example of the present invention will now be described in detail with reference to the accompanying drawings, in which:

Figure 1 shows a block diagram of an optical amplifier according to the present invention;

Figure 2 shows a block diagram of a signal processing circuit suitable for use in the optical amplifier shown in Figure 1;

Figure 3 shows a graph of normalised gain of an EDFA against wavelength of the input signal;

Figure 4 shows a graph of normalised gain of a Raman amplifier against wavelength of the input signal;

Figure 5 shows a graph of combined normalised gain of an EDFA and a Raman amplifier against wavelength of the input signal; and,

Figure 6 shows a communications network having a number of repeaters having an amplifier according to the present invention.

Detailed Description

[0014] Figure 1 shows a block diagram of an example of an optical amplifier according to the present invention. The amplifier 1 has a length of transmission fibre 2 providing a Raman amplifier stage and an EDFA 3 connected in series. A photodetector 5 in a feedback loop in the amplifier detects a Send Level output of an optical signal propagating through the amplifier 1 and couples the detected level to the signal processing circuit 4 via a coupler 6. The amplifier 1 also includes pump sources (not shown) for pumping each of the transmission fibre 2 and the EDFA 3 via a WDM coupler 7. In this example, the pump sources are contained within the signal processing circuit 4. The pump light is provided from the pump sources via connections 8, 9 and 10 between the signal processing circuit 4 and the transmission fibre 2 and the EDFA3. An optical isolator 11 is provided at the output of the amplifier 1.

[0015] Figure 2 shows a block diagram of a signal processing circuit 4 suitable for use in the optical amplifier shown in Figure 1. The signal processing circuit 4 has a first pump source 12 arranged to co-pump the EDFA 3 at a wavelength of 980nm and a second pump source 13 arranged to counter-pump the EDFA 3 and the Raman amplifier stage 2 at a wavelength of 1475nm. The pump level of pump source 12 is set at a constant value whereas, as will be described below, the pump level of pump source 13 is variable in dependence on the detected Send Level output of amplifier 1.

The signal processing circuit 4 also has an ALC unit 14 having a comparator 15 arranged in a negative feedback control loop. The Send Level output from the amplifier 1 and a voltage reference signal from a voltage reference signal generator 16 are used as inputs to the comparator 15. The output from the comparator 15 is used as an error signal to control the pump level of pump source 13 in that a change in the error signal will cause a corresponding change in the pump level of pump source 13. By setting the voltage reference signal at a desired level, the output of the comparator 15 and hence the Send Level output of the amplifier 1 can be controlled.

[0016] A splitter 17 is arranged to split the output from pump source 13, a predetermined proportion of the total output power of pump source 13 being used to counter-pump each of the EDFA 3 and the transmission fibre 2. As will be described below, the ratio of the split may be set independently in accordance with a user's needs.

[0017] The operation of the amplifier 1 will now be described with reference to Figures 1 and 2. When the input level to the amplifier 1 decreases from a nominal value this would ordinarily lead to a corresponding decrease in the Send Level output of the amplifier 1. In this case, when the Send Level output decreases the output from comparator 15 increases thereby increasing the pump level of pump source 13. However, increasing the pump level supplied to the EDFA 3 causes a clockwise gain tilt in the output of the EDFA 3 (shorter wavelengths will experience higher gain than longer wavelengths (see Figure 2)). Typically, for a 10dB EDFA the gain tilt will be of the order of 0.2dB/dB over a 12nm wavelength range. Therefore, to compensate for this change in gain tilt, the transmission fibre 2 is also counter-pumped by pump source 13 to provide an amount of Raman amplification, in contrast to the clockwise gain tilt change caused by the EDFA 3, WDM signals in the range 1548 to 1560nm will see a counterclockwise gain tilt when the Raman gain increases (see Figure 4). Typically, the transmission fibre 3 can have a Raman gain of the order of 440 cm^{-1} which is about 100-110nm for a 1480nm pump. The change in gain tilt will be of the order of 0.3dB/dB. Therefore it is possible to compensate the change in gain tilt in the EDFA using the opposite change in gain tilt of the Raman gain of the transmission fibre.

[0018] When there is a reduction in the input level to the amplifier 1, the extra gain which is needed to maintain the output level of the amplifier at a constant value is jointly provided by an increment in the gain of the EDFA 3 and an increment in the gain of the Raman amplifier in the transmission fibre 2. The overall change in gain tilt of the amplifier 1 is therefore minimised.

[0019] In use, part of the optical output of amplifier 1 is directed into a negative feedback control loop as the Send Level output via photodetector 5 to the signal processing circuit 4. The voltage reference signal gen-

erator 16 provides a voltage reference signal V_{ref} to the positive terminal of comparator 15, the Send Level output from photodetector 5 being coupled to the negative terminal of comparator 15. As the Send Level output drops, usually in response to a decrease in input level to the amplifier 1, the negative feedback control loop serves to increase the pump level supplied by pump source 13 thereby increasing the respective gains of the Raman amplifier 2 and the EDFA 3.

[0020] The output of pump source 13 is coupled to the splitter 17 which ensures that the pump levels of EDFA 3 and Raman amplifier 2 are simultaneously adjusted in accordance with the Send Level output changes to ensure that the gain tilt of the amplifier 1 remains flat. For example, if a decrease in the Send Level output of 3dB is detected by the signal processing circuit 4, a corresponding 3dB increase in the gain of the amplifier 1 will be required to maintain the Send Level output at a constant level. To achieve this, the gain of the EDFA 3 may be increased by 1.8dB and the gain of the Raman amplifier 2 may be increased by 1.2dB. The proportions of power from the pump source 13 supplied to each of the EDFA 3 and the Raman amplifier stage 2 are set by the splitter 17 and are determined in accordance with a user's needs. As such, the Send Level output of the amplifier 1 will be maintained at a constant level whilst simultaneously ensuring that the gain tilt of the amplifier 1 will also remain substantially flat.

[0021] Figures 3 and 4 show graphs of normalised gain of an EDFA and a Raman amplifier respectively against wavelength of an input signal. The graphs show how over a wavelength range of 1544nm to 1560nm the gain tilt of the EDFA changes. At a low value of the gain, the gain tilt is positive, whereas at a high value of the gain the gain tilt is negative. In contrast to this, for the Raman gain in the transmission fibre, for a low value of gain the gain tilt is negative whereas for a high value of gain the gain tilt is positive.

[0022] Figure 5 shows a graph of combined normalised gain of an EDFA and a Raman amplifier against wavelength of the input signal. By combining the effects as shown in the graphs of Figures 3 and 4, a constant flat gain tilt over a range of 1544 to 1560nm is obtained.

[0023] Figure 6 shows a submarine communications network having a number of optical repeaters 20 each incorporating a number of optical amplifiers according to the present invention. The network has a submarine cable 18 linking first and second endstations 19₁ and 19₂ via a number of such optical repeaters 20. The output level of each of the optical repeaters 20 can be determined by setting an appropriate value for the reference voltage signal V_{ref} in the respective signal processor. Since each of the repeaters includes optical amplifiers according to the present invention, relative channel levels of WDM signals in each optical fibre in the submarine cable will be maintained over the entire link.

Claims

1. An optical amplifier (1) for a wavelength division multiplexed communications system, comprising:

a first amplifier stage (2) responsive to changes in gain to cause a wavelength dependent gain tilt in one direction;

a second amplifier stage (3) responsive to corresponding changes in gain to cause a wavelength dependent gain tilt in an opposite direction; and,

gain control means (4) for controlling the gain of the first and second amplifier stages to maintain a substantially flat response for the amplifier over time in which the first amplifier stage is a length of optical transmission fibre providing a Raman amplifier.

2. An optical amplifier (1) according to claim 1, in which the gain control means (4) comprises a signal processing circuit coupled to an output of the optical amplifier (1) arranged to detect changes in output level of the amplifier (1) and adjust the gains of the first amplifier stage (2) and the second amplifier stage (3) accordingly.

3. An optical amplifier (1) according to claim 2, in which the signal processing circuit comprises a pump control circuit (12,13) arranged in a negative feedback control loop around at least one amplifier stage, such that when a decrease in output level of the amplifier is detected the gains of the first amplifier stage and the second amplifier stage are adjusted accordingly to maintain the output of the amplifier at a substantially constant level.

4. An optical amplifier (1) according to any preceding claim, in which the second amplifier stage (3) is an Erbium Doped Fibre Amplifier.

5. An optical amplifier (1) according to any preceding claim, in which the gain control means (4) comprises at least one pump source (12,13) arranged to provide pump light to the first amplifier stage (2) and to the second amplifier stage (3), the power of the pump light being determined in dependence on the output level of the amplifier (1).

6. An optical amplifier according to claim 5, comprising an optical splitter (17) arranged to couple a predetermined proportion of the pump light to the first amplifier stage (2) thereby causing a wavelength dependent gain tilt in a first direction and a predetermined proportion of the pump light to the second amplifier stage (3) thereby causing a wavelength

dependent gain tilt in an opposite direction.

7. An optical amplifier (1) according to claim 5 or 6, in which the gain control means comprises two pump sources (12, 13) in which a first pump source (12) is arranged to counterpump the first amplifier stage and the second amplifier stage, and a second pump source (13) is arranged to co-pump one of the first amplifier stage (2) and the second amplifier stage (3).
5
10
8. An optical repeater (1) for a submarine communications system comprising an optical amplifier (1) according to any preceding claim.
15
9. A submarine communications system comprising at least one optical repeater according to claim 8.
20
25
30
35
40
45
50
55

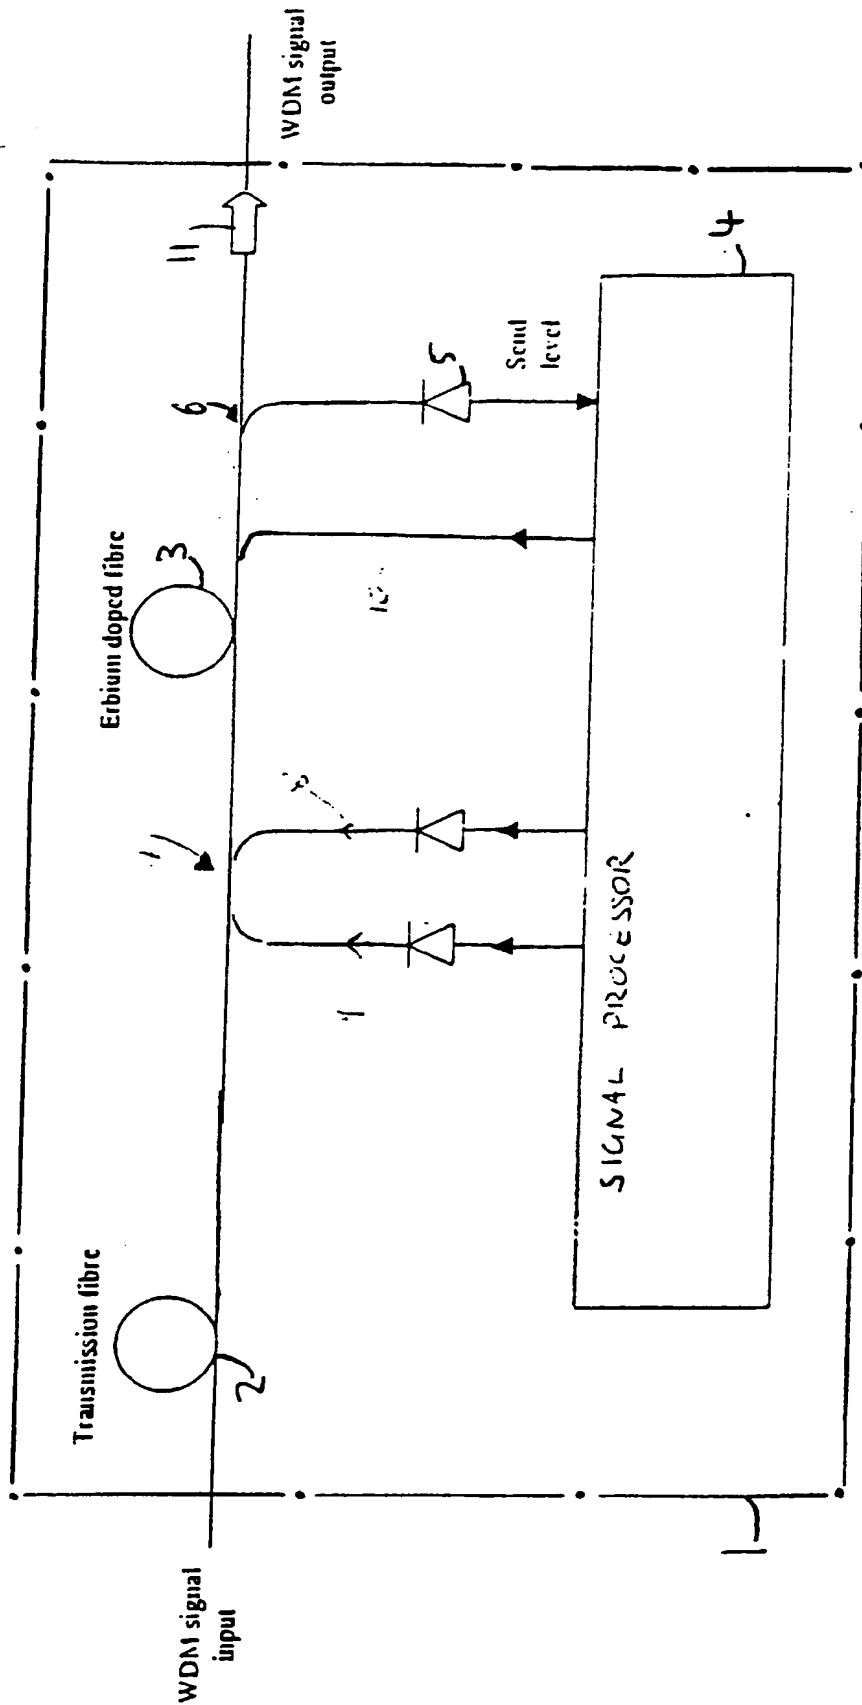


Fig 1

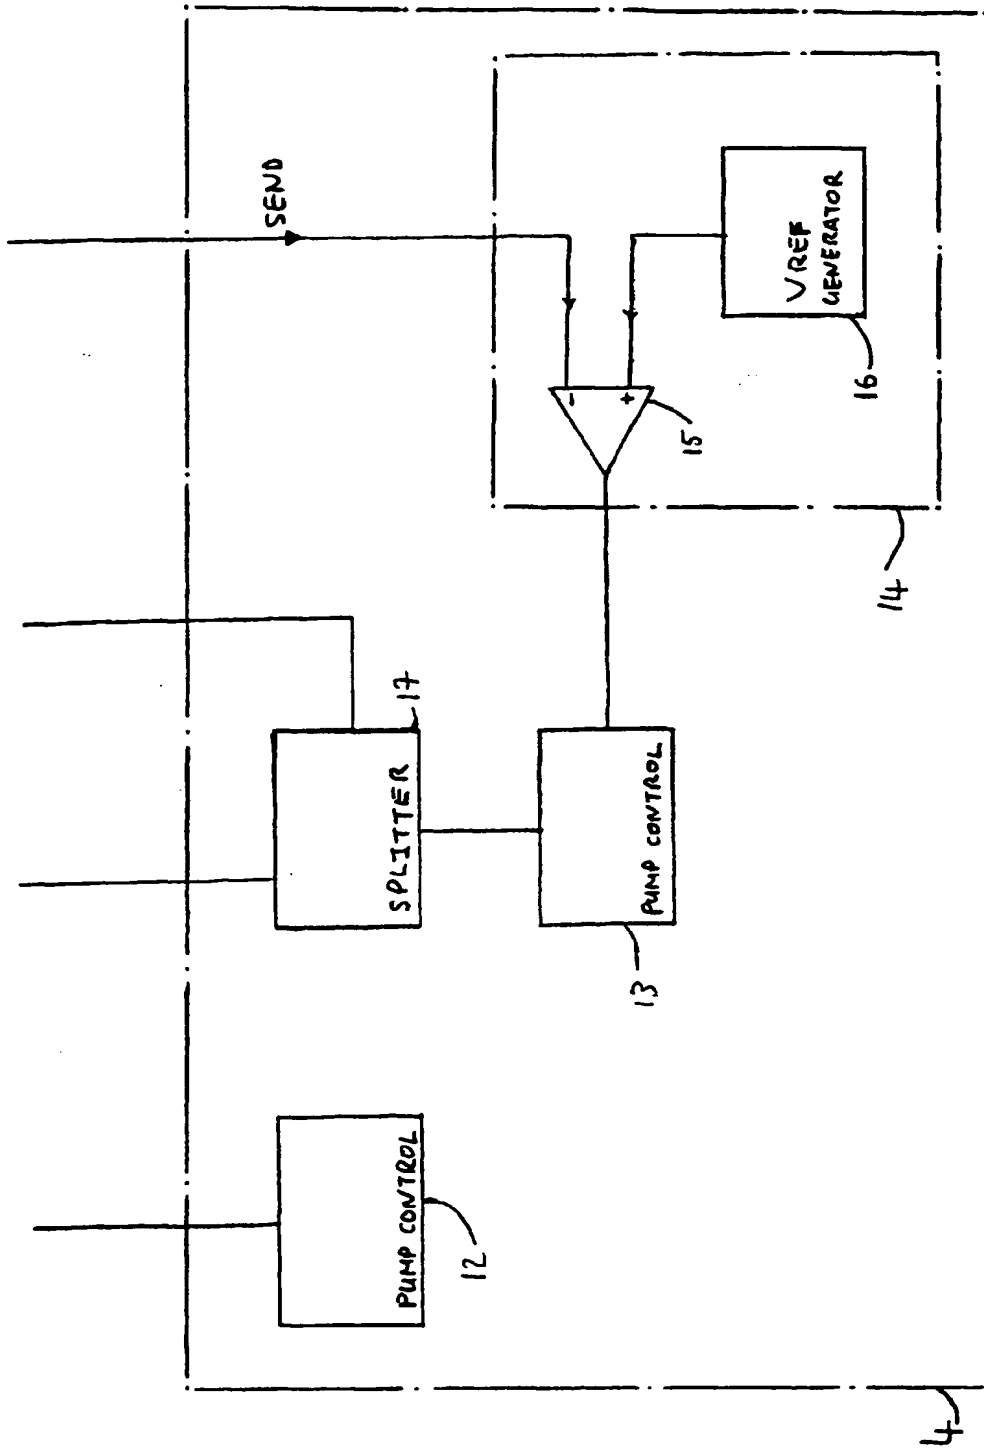


fig 2

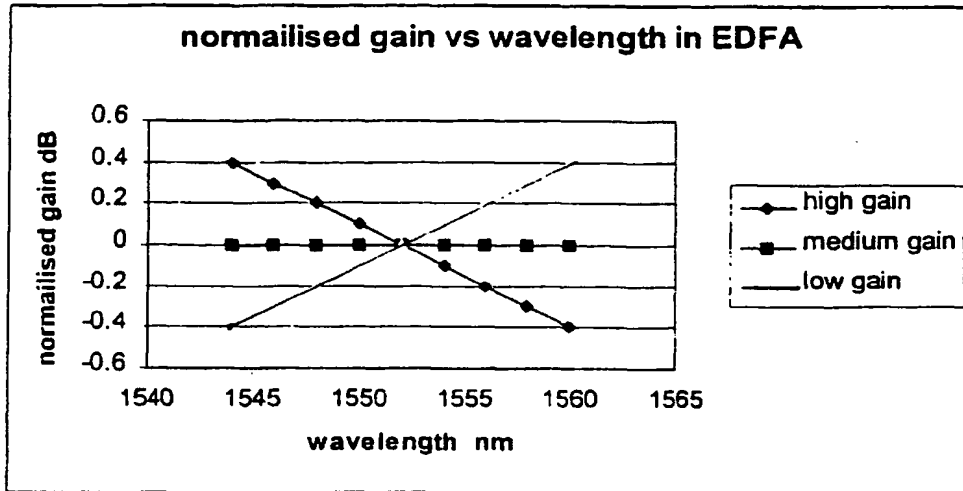


Fig 3

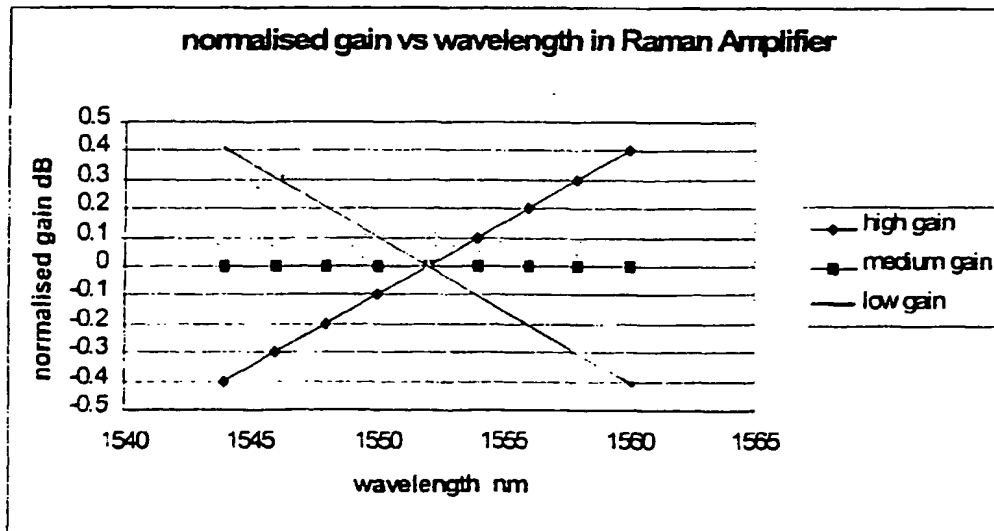


Fig 4

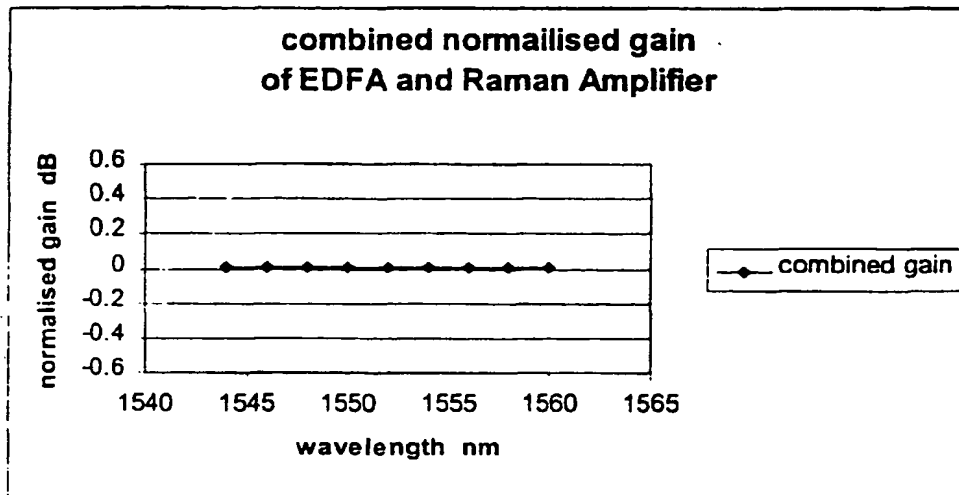


Fig 5


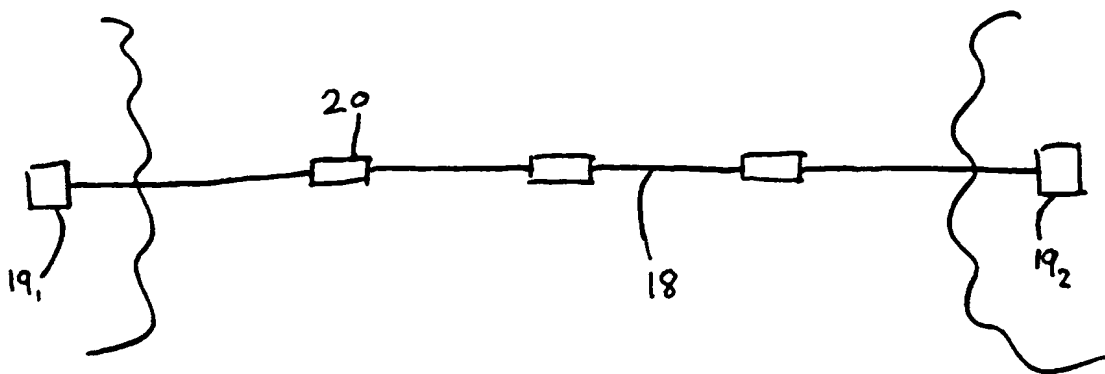


Fig 6



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 054 489 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
15.10.2003 Bulletin 2003/42

(51) Int Cl.7: **H01S 3/067**, H01S 3/30,
H04B 10/17

(43) Date of publication A2:
22.11.2000 Bulletin 2000/47

(21) Application number: **00303713.2**

(22) Date of filing: **03.05.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

• **Xue-hang, Shan**
Thamesmead West, London SE28 0HS (GB)
• **Willeits, Derek**
Dartford, Kent DA2 6NL (GB)

(30) Priority: **19.05.1999 GB 9911665**

(71) Applicant: **ALCATEL**
75008 Paris (FR)

(74) Representative: **Lamoureux, Bernard**
Compagnie Financière Alcatel
Département de Propriété Industrielle,
5, rue Noel Pons
92734 Nanterre Cedex (FR)

(72) Inventors:
• **Hazell, Neville**
West Wickham, Kent BR4 0DX (GB)

(54) **An optical amplifier**

(57) The present invention provides an optical amplifier for a wavelength division multiplexed communication system, including a first amplifier stage responsive to changes in gain to cause a wavelength dependent gain tilt in one direction, a second amplifier stage (3) responsive to corresponding changes in gain to cause a wavelength dependent gain tilt in an opposite direction

and gain control means (4) for controlling the gain of the first (2) and second (3) amplifier stages to maintain a substantially flat response for the amplifier (1) over time, in which the first amplifier stage (2) is a length of optical transmission fibre providing a Raman amplifier. The present invention provides an optical amplifier which uses dynamic gain tilt adjustment whilst maintaining a constant output level from the amplifier.

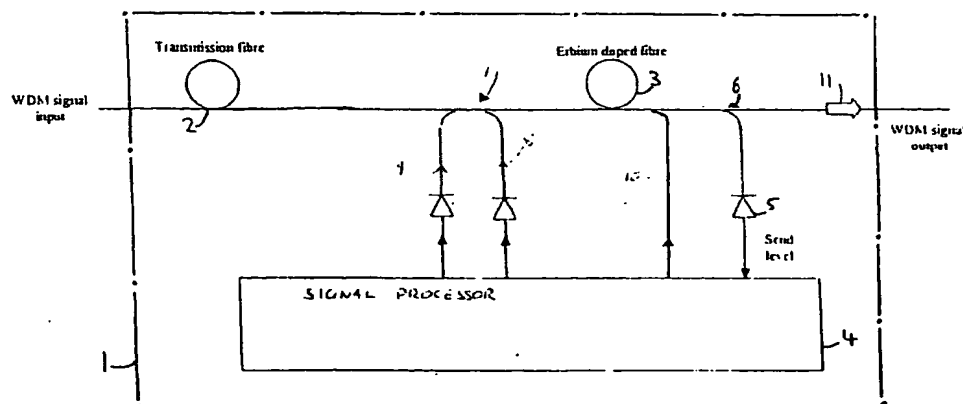


Fig 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 3713

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 01, 31 January 1997 (1997-01-31) & JP 08 248455 A (FUJITSU LTD), 27 September 1996 (1996-09-27) * abstract; figures 1,2,9 *	1-9	H01S3/067 H01S3/30 H04B10/17
Y	MASUDA H ET AL: "ULTRA-WIDEBAND HYBRID AMPLIFIER COMPRISING DISTRIBUTED RAMAN AMPLIFIER AND ERBIUMDOPED FIBRE AMPLIFIER" ELECTRONICS LETTERS, IEE STEVENAGE, GB, vol. 34, no. 13, 25 June 1998 (1998-06-25), pages 1342-1344, XP000846341 ISSN: 0013-5194 * the whole document *	1-9	
A	US 5 835 259 A (SHIGEMATSU MASAYUKI ET AL) 10 November 1998 (1998-11-10) * figures 7-9 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01S H04B
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 August 2003	Examiner Galant1, M
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P4/C01)

ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 00 30 3713

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-08-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 08248455 A	27-09-1996	US 6055092 A	25-04-2000
		US 2002093726 A1	18-07-2002
		US 2003002140 A1	02-01-2003
		US 6369938 B1	09-04-2002
		US 6480329 B2	12-11-2002
		US 2001046084 A1	29-11-2001
		US 2001026395 A1	04-10-2001
US 5835259 A	10-11-1998	JP 9080492 A	28-03-1997

EPO FORM P439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82